



ESLX		
1	2	3
1 MODEL	2 POWER	5 LED COLOR
ESLX	L1: 1 Watt L2: 2 Watt L3: 3 Watt L4: 4 Watt L5: 5 Watt	R: Red G: Green



CERTIFICATIONS

UL844/ CSA C22.2 No. 137-18
 CI D1 Groups B,C,D
 CI D2 Groups A,B,C,D
 CII D1 Groups E,F,G
 CII D2 Groups F,G
 CIII
 UL924
 IP66
 ABS
 Ambient Temperature -10°C to +60°C

CONSTRUCTION

Housing: A356T6 aluminum
 Exit Sign Plate: Tempered Glass
 Hardware: Stainless Steel
 Mounting Sling: Stainless Steel
 Baked on gray epoxy finish

ELECTRICAL

120-277VAC, 50/60Hz
 Emergency Time: 3 hours

FEATURES

3/4" NPT conduit hubs
 Lifespan up to 50,000 hours
 Edge lit sign

EXPLANATION OF INDICATOR LIGHT

If three or two indicator lights remain on during initial power on, it is necessary to reset them by detecting the switch: Press the switch "ON" for 5 to 6 seconds ->OFF ->ON.

RED:

- 1.Fast charging for 2 hours.
- 2.Charging indicator, displaying 20% -80% battery capacity.

GREEN:

- 1.Trickle charging.
- 2.Charging indicator, displaying 80% -100% battery capacity.
- 3.Green light on when disconnecting the battery.

RED and GREEN:

Red and Green flashes alternately for 5 minutes, indicating that it is at 80% battery capacity.


YELLOW:

- 1.Discharge below 20%.
- 2.If the yellow light is on in any state, the product is out of order.


DESCRIPTION OF SWITCH

1. Press the switch "ON" once, the EXIT sign and indicator light will flash once, with an ON/OFF interval of 10 seconds.
2. With mains electricity disconnected, long press and hold the switch for 3 to 5 seconds to turn off the product. If the EXIT sign needs to be turned on again, it will be activated through mains electricity.
3. The product will automatically have monthly inspection. EXIT sign and indicator light will flash once every 30 or 31 days.
4. The product will automatically have an annual inspection. EXIT sign and indicator light will flash twice every year.


DIMENSIONS

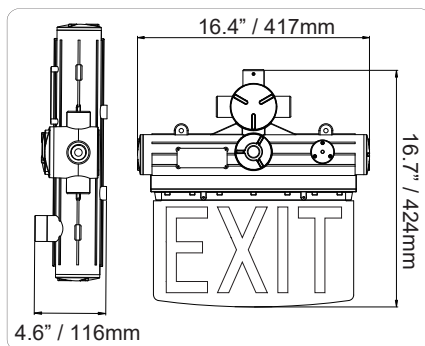

MOUNTING OPTIONS

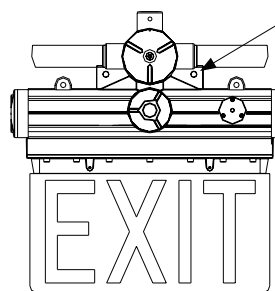

Wall Mounting

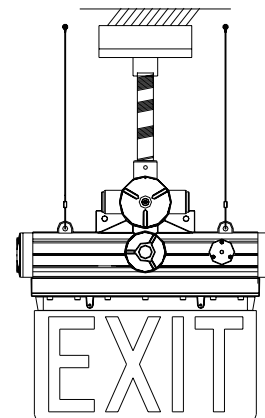

Pendant / Chain Hang