



ESLH

CLASS I, DIVISION 2 LED EXIT SIGN



1 MODEL	2 POWER	5 LED COLOR
ESLH	L1: 5 Watt	R: Red G: Green



CERTIFICATIONS

UL844 /
CI D2 Groups A,B,C,D
C2 D1 Groups E,F,G
UL924
IP66
ABS
Ambient Temperature -20°C to +60°C

CONSTRUCTION

Housing: Aluminum
Exit Sign Plate: Tempered Glass
Hardware: Stainless Steel
Mounting Sling: Stainless Steel


ELECTRICAL

120-277VAC, 60Hz, 0.5A, 5W
Emergency Time: 3 hours
Charge Time: 24 hours

FEATURES

Suitable for wet location
Low energy consumption
Light weight and compact structure
Sealed unit. Battery not replaceable.

DIMENSIONS

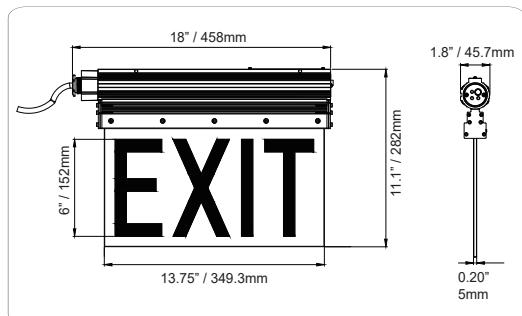

EXPLANATION OF INDICATOR LIGHT

If three or two indicator lights remain on during initial power on, it is necessary to reset them by detecting the switch: Press the switch "ON" for 5 to 6 seconds ->OFF ->ON.

RED:

1. Fast charging for 2 hours.
2. Charging indicator, displaying 20% -80% battery capacity.

GREEN:

1. Trickle charging.
2. Charging indicator, displaying 80% -100% battery capacity.
3. Green light on when disconnecting the battery.

RED and GREEN:

Red and Green flashes alternately for 5 minutes, indicating that it is at 80% battery capacity.

YELLOW:

1. Discharge below 20%.
2. If the yellow light is on in any state, the product is out of order.

MOUNTING OPTIONS

