


The LE485R-2FT Series is a hinged, REAR ACCESS, recessed mount, LED paint booth luminaire. The LE485R-2FT is made of a combination of 20 gauge cold rolled steel and .090 aluminum. This LED fixture is available in 4 Ft. lengths with 1, 2, or 3 rows of LED's. This fixture can be used with or without optics, has dimming capabilities, and is available with an EM option.



1 SERIES	2 SOURCE	3 VOLTAGE	4 OPTICS	5 DIMMING	6 CCT	7 WIRE WHIP	8 OPTIONS
LE485R-2FT	22: 22W (1 Row) 32: 32W (1 Row) 50: 50W (2 Row) 62: 62W (2 Row) 70: 70W (3 Row) 90: 90W (3 Row)	V1: 120-277VAC (50/60Hz)	Blank: None A: Diffused Acrylic	Blank: None D1: 0-10V D2: DALI	3: 3,500K 4: 4,000K 5: 5,000K	Blank:None WH: Wire Whip (10ft.) *3-wire wire whip standard. Total number of leads dependent on options ordered	SP: Surge Protector (430 joules) EM: Battery/Driver Backup (90min.)

CERTIFICATIONS

UL844 / CSA-C22.2 No.137 (Hazardous)
CI D2, Grps A,B,C,D
CII D2, Grps F,G
Paint Spray Listed
T Code: CI D2, CII D2=T3C (T3C w/ EM option) (TBD)
UL1598 / CSA-C22.2 No.250 (Wet/Damp)
Lumen Maintenance (L70) >54,000 hrs. (reported)
CRI >80
-30°C to 55°C Ambient (TBD)

CONSTRUCTION

20 gauge white powder coated steel housing
Hinged, rear access panel
Silicone free gaskets
Acrylic diffused lens (optional)
2 Ft. length
Clear tempered glass panel
1/2" NPT Hub(s)
Weights: Min: 23lbs. / Max: 43lbs.

ELECTRICAL

120-277VAC
10Ft. 3-wire whip (standard)
6kV Built-in driver surge protection

FEATURES

0-10V Dimming or DALI
Recess mount - Rear access
Withstands up to 71°C bake cycle for 90 minutes with fixture power interlock off
Emergency/Battery backup option available
5 year warranty

PERFORMANCE

Source	Voltage (VAC) 50/60Hz	Input Current (A)	Wattage (W)	CCT	Lumen Output* (Lm)	
					No Optic	Diffused Acrylic Optic
22 (1 Row)	.18-.07	22	3,500K	2705	2205	
			4,000K	2750	2250	
			5,000K	2800	2290	
	.27-.12	32	3,500K	3830	3070	
			4,000K	3910	3135	
			5,000K	3950	3165	
32 (1 Row)	.42-.18	50	3,500K	6345	5025	
			4,000K	6475	5180	
			5,000K	6540	5230	
	.52-.22	62	3,500K	7685	6180	
			4,000K	7845	6305	
			5,000K	7925	6370	
50 (2 Rows)	.58-.25	70	3,500K	9335	7470	
			4,000K	9530	7625	
			5,000K	9625	7700	
	.75-.32	90	3,500K	11500	9315	
			4,000K	11735	9510	
			5,000K	11855	9605	



LE485R-2FT

LED BOOTH LIGHTING - REAR ACCESS


Paint and Powder Booths • Blast Booths • Clean Rooms • Prep • Sanding




DIMENSIONS

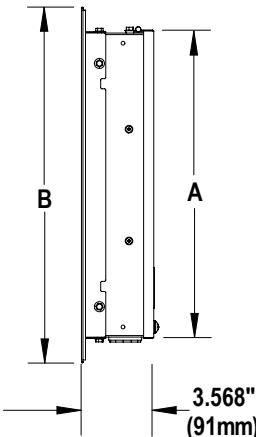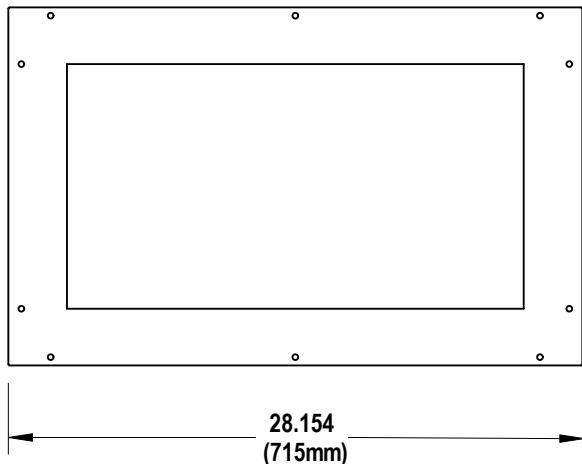


Source	Dimensions* (in./mm)	
	A	B
22W / 32W (1 Row)	10.219" (260mm)	13.065" (319mm)
50W / 62W (2 Row)	15.219" (387mm)	18.065 (446mm)
70W / 90W (3 Row)	20.219" (514mm)	23.065" (573mm)



Standard Fixture & D2 Dimming Option (1/2" NPT)



Emergency Fixture & D2 Dimming Option (1/2" NPT)

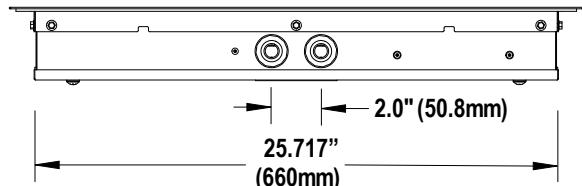


D1 Dimming Option (1/2" NPT)



Emergency D1 Dimming Option (1/2" NPT)

PANEL CUTOUT DIMENSIONS

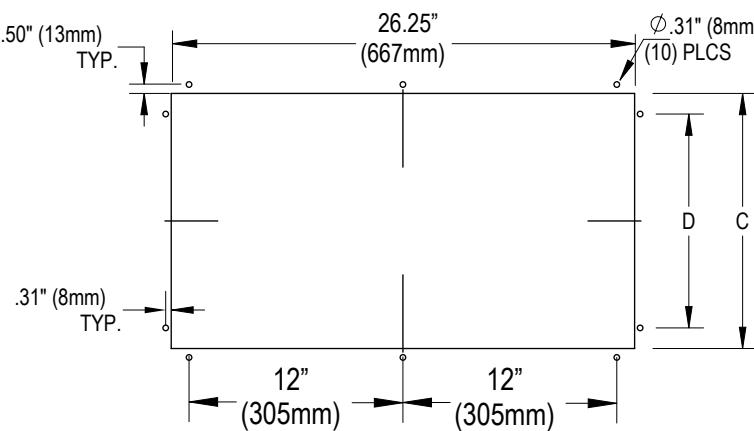

Source	Dimensions* (in./mm)	
	C	D
22W / 32W (1 Row)	10.75" (273mm)	7" (178mm)
50W / 62W (2 Row)	15.75" (400mm)	12" (305mm)
70W / 90W (3 Row)	20.75" (527mm)	17" (432mm)